


Colours



Shape

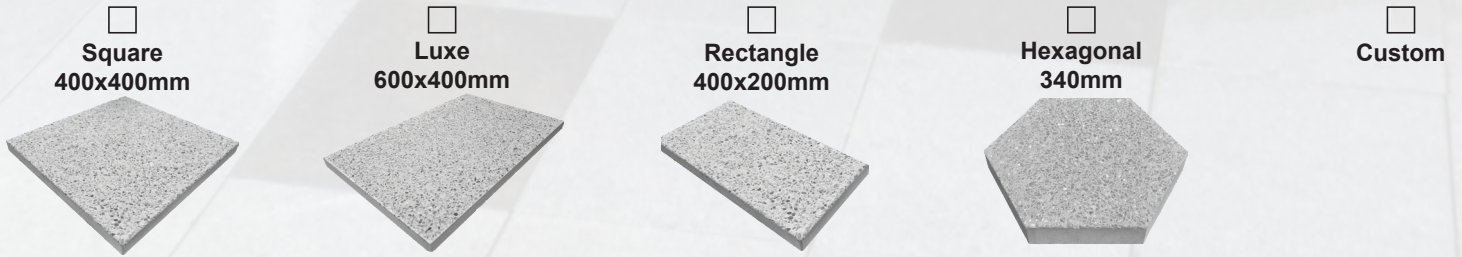

Thickness

- 40mm
 60mm

Test

	400x400mm	600x400mm	200x400mm	Standard
Breaking Load 40mm (kN)	6.1			AS/NZS 4456.5
Breaking Load 60mm (kN)	10.9			AS/NZS 4456.5
Dimensional Deviation (mm)			±1	AS/NZS 4456.3
Compressive Strength (MPa)	29			AS/NZS 4456.4
Slip Resistance	P5			AS/NZS 4586 App A
Abrasive Resistance (Va)	3.0			AS/NZS 4456.9

*Independently tested by SGS Australia



Sandstone Quartz
400x400x40mm



Ice, Greystone & Charcoal Quartz
600x400x60mm



Quartz Hexagonal 60mm



Charcoal Quartz
600x400x60mm



Hazard & Directional Tactiles
400x400x60mm



Ice & Charcoal Quartz
400x400x40mm